



FEATURES

- Single fiber bi-directional data links TX 10.3125Gbps, Burst Mode RX 10.3125Gbps application
- Single fiber bi-directional data links TX 1.25Gbps, Burst Mode RX 1.25Gbps application
- 0 to 70°C operating case temperature
- 3.3V, 5V power supply
- XFP package with SC Receptacle connector
- Hot-pluggable capability
- High power 1577nm EML LD and High power 1490nm DFB LD
- High sensitivity 1270nm and 1310nm APD
- Support 20km transmission distance with SMF
- LOS indication
- Low EMI and excellent ESD protection
- Digital diagnostic monitor interface
- RoHS6 compliance

APPLICATIONS

- Symmetric 10GEPON OLT
- GEPON PX20+ OLT

STANDARDS

- Complies with IEC 60950-1
- Complies with IEEE 802.3av
- Complies with IEEE 802.3ah
- Complies with FCC 47 CFR Part 15, Class B
- Complies with FDA 21 CFR 1040.10 and 1040.11

ABSOLUTE MAXIMUM RATING

Parameter	Symbol	Min.	Max.	Unit	Notes
Storage Ambient Temperature	T _{STG}	-40	85	°C	
Operating Case Temperature	T _c	0	70	°C	
Operating Humidity	OH	5	95	%	
VCC3 Power Supply Voltage	VCC3	-0.5	3.6	V	
VCC5 Power Supply Voltage	VCC5	-0.5	5.5	V	

RECOMMENDED OPERATING CONDITION

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Operating Case Temperature	T _c	0		+70	°C	
VCC3 Power Supply Voltage	VCC3	3.13	3.3	3.47	V	
VCC5 Power Supply Voltage	VCC5	4.75	5	5.25	V	
VCC3 Power Supply Current	ICC3		-	900	mA	
VCC5 Power Supply Current	ICC5		-	380	mA	
Date Rate			10.3125 1.25		Gbps Gbps	
Date Rate Drift		-100		+100	PPM	

10GEPON TRANSMITTER OPTICAL CHARACTERISTICS

Parameter	Symb	Min.	Typ.	Max.	Unit	Notes
Optical Center Wavelength	λ_c	1575		1580	nm	
Optical Spectrum Width (-20dB)	$\Delta\lambda$	-	-	1	nm	
Side Mode Suppression Ratio	SMSR	30			dB	
Average Launch Optical Power	AOP2	+2		+5	dBm	Launched into SMF
Power-OFF Transmitter Optical Power				-39	dBm	Launched into SMF
Extinction Ratio	ER	6			dB	PRBS2 ³¹ -1 @10.3125Gbps
Total Jitter	TJ			0.39	UI	PRBS2 ³¹ -1 @10.3125Gbps
RIN ₁₅ OMA				-128	dB/Hz	
Transmitter Reflectance				-10	dB	
Transmitter and Dispersion Penalty	TDP			1.5	dB	Transmit on 20km SMF
Optical Waveform Diagram	Compliant with IEEE Std 802.3av					Figure 1, Mask Margin>5%

10GEPON TRANSMITTER ELECTRICAL CHARACTERISTICS

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Data Input Differential Swing		120		850	mV	CML input, AC coupled
Input Differential Impedance		90	100	110	Ω	
Transmitter Enable Voltage - Low		0		0.8	V	
Transmitter Disable Voltage - High		2.0		V_{CC}	V	

GEPON TRANSMITTER OPTICAL CHARACTERISTICS

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Optical Center Wavelength	λ_C	1480		1500	nm	
Optical Spectrum Width (-20dB)	$\Delta\lambda$			1	nm	
Side Mode Suppression Ratio	SMSR	30			dB	
Average Launch Optical Power	AOP	+2		+7	dBm	Launched into SMF
Power-OFF Transmitter Optical Power				-39	dBm	Launched into SMF
Extinction Ratio	ER	9			dB	PRBS 2 ⁷ -1 test pattern @1.25Gbit/s
Total Jitter	TJ			0.43	UI	PRBS 2 ⁷ -1 test pattern @1.25Gbit/s
Rise/Fall Time (20%-80%)	T_R/T_F			260	ps	Bessel-Thompson Filter OFF.
RIN _{15OMA}				-115	dB/Hz	
Optical Return Loss Tolerance				15	dB	
Transmitter Reflectance				-10	dB	
Transmitter and Dispersion Penalty	TDP			2.3	dB	Transmit on 20km SMF
Optical Waveform Diagram	Compliant with IEEE Std 802.3ah™-2004					Figure 2, Mask Margin>5%

GEPON TRANSMITTER ELECTRICAL CHARACTERISTICS

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Data Input Differential Swing		200		1600	mV	LVPECL input, AC coupled
Input Differential Impedance		90	100	110	Ω	
Transmitter Disable Voltage - Low		0		0.8	V	
Transmitter Disable Voltage - High		2.0		V_{CC}	V	

TRANSMITTER EYE MASK DEFINITIONS AND TEST PROCEDURE

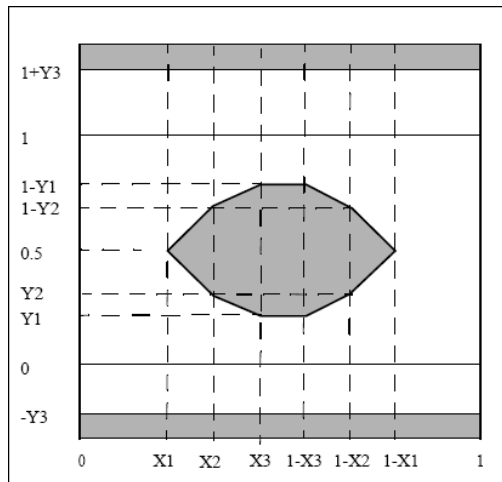


Figure 1 10GEPON Transmitter Eye Mask Definitions

X1	X2	X3	Y1	Y2	Y3	Unit
0.25	0.40	0.45	0.25	0.28	0.40	UI

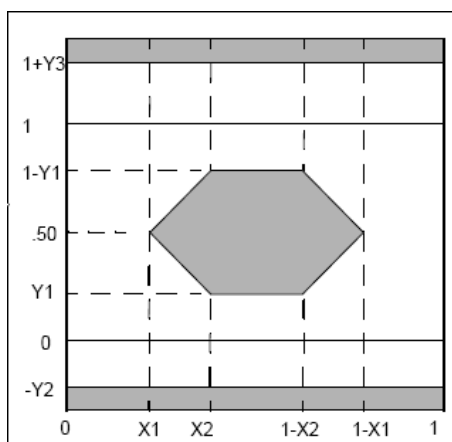


Figure 2 GEPON Transmitter Eye Mask Definitions

X1	X2	Y1	Y2	Y3	Unit
0.22	0.375	0.20	0.20	0.30	UI

10GEPON RECEIVER OPTICAL CHARACTERISTICS

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Operating Wavelength		1260		1280	nm	
Sensitivity	SEN			-28	dBm	PRBS2 ³¹ -1@10.3125Gbps BER ≤1×10 ⁻³
Saturation Optical Power	SAT	-6			dBm	PRBS2 ³¹ -1@10.3125Gbps BER ≤1×10 ⁻³
LOS De-Assert Level				-29	dBm	
LOS assert Level		-44			dBm	
Hysteresis		0.5		6	dB	
Receiver Reflectance				-12	dB	

10GEPON RECEIVER ELECTRICAL CHARACTERISTICS

Parameter	Symbol	Min.	Typ.	Max.	Unit.	Notes
Receiver Threshold Settling Time	T _{SETTLING}			800	ns	Figure 3
Data Output Differential Swing		340		850	mV	CML output, DC coupled
LOS Assert Time			0.5		μs	
LOS De-assert Time			0.5		μs	
LOS Voltage - Low		0		0.4	V	
LOS Voltage - High		2.4		VCC	V	

GEPON RECEIVER OPTICAL CHARACTERISTICS

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Operating Wavelength		1260		1360	nm	
Sensitivity	SEN			-29.78	dBm	PRBS 2 ⁷ -1@1.25Gbps BER ≤1×10 ⁻¹²
Saturation Optical Power	SAT	-6			dBm	PRBS 2 ⁷ -1@1.25Gbps BER ≤1×10 ⁻¹²
LOS De-Assert Level				-31	dBm	
LOS Assert Level		-40			dBm	
Hysteresis		0.5		6	dB	
Receiver Reflectance				-12	dB	

GEPON RECEIVER ELECTRICAL CHARACTERISTICS

Parameter	Symbol	Min.	Typ.	Max.	Unit.	Notes
Receiver Threshold Settling Time	$T_{SETTLING}$			400	ns	Figure 3
Data Output Differential Swing		600		1600	mV	LVPECL output, DC coupled
LOS Assert Time			0.5		μ s	
LOS De-assert Time			0.5		μ s	
LOS Voltage - Low		0		0.4	V	
LOS Voltage - High		2.4		VCC	V	
RSSI Trigger-Low		0		0.8	V	
RSSI Trigger-High		2.0		Vcc	V	

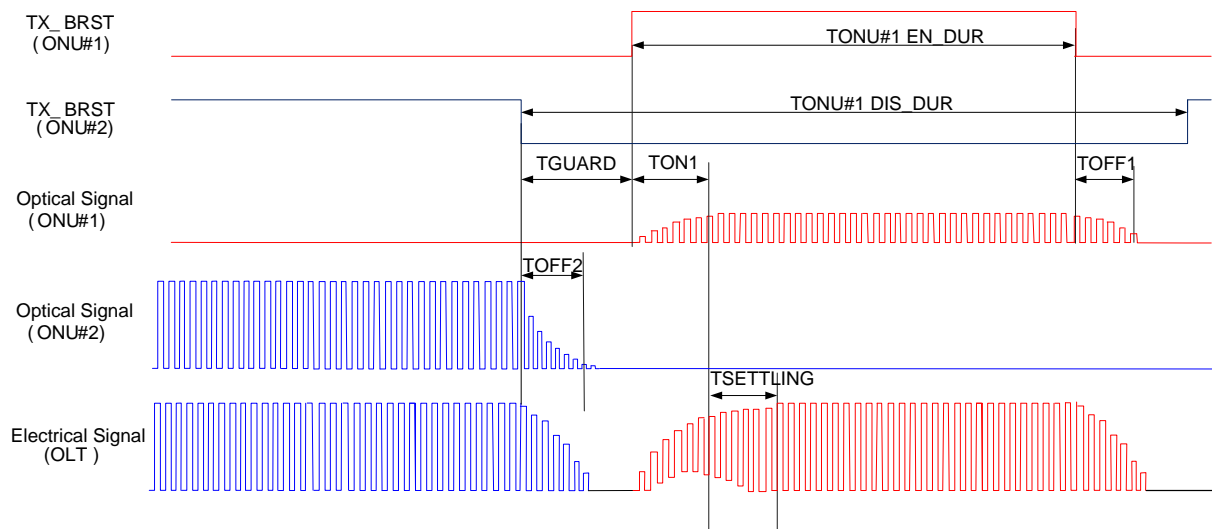
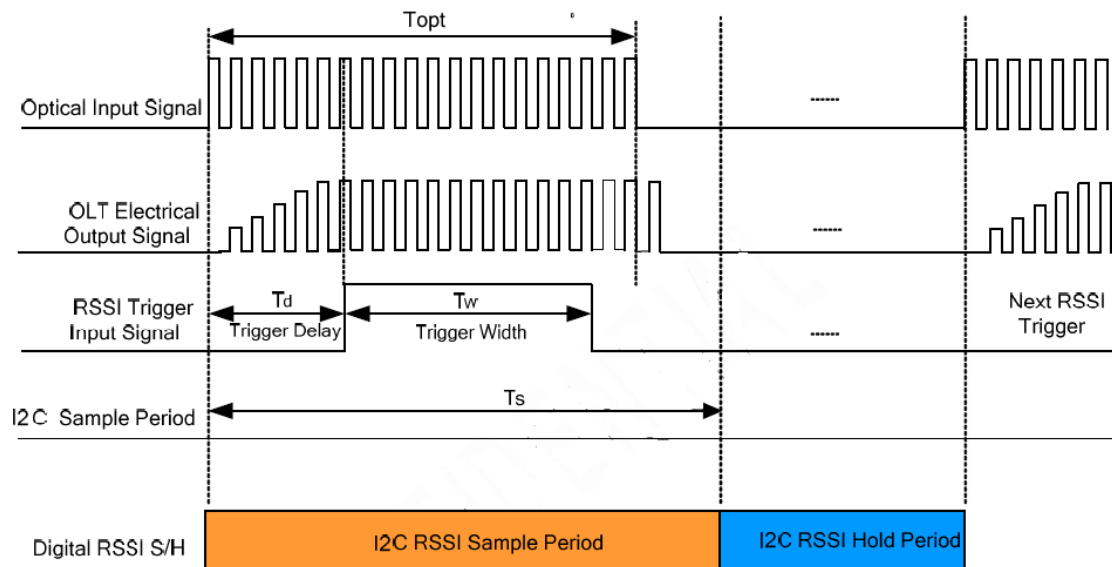
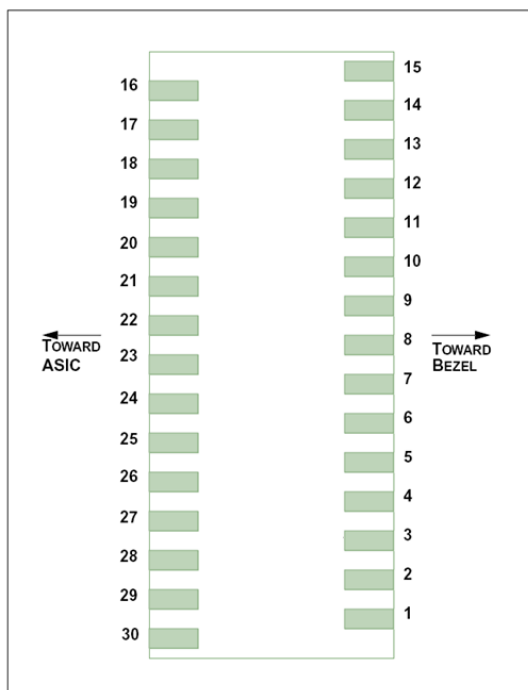
TIMING PARAMETER DEFINITIONS IN BURST MODE SEQUENCE


Figure 3 Timing Parameter Definitions in Burst Mode Sequence

RSSI TIMING SEQUENCE

Parameter	Symbol	Min.	Typ.	Max.	Unit.	Notes
Optical Signal During Time	T_{opt}		1500		ns	
RSSI Trigger width	T_w		500		ns	
RSSI Trigger Delay	T_D		300		ns	
I ² C Access Prohibited Time		500			μ s	

Digital RSSI Sample/Hold Timing Specification

Figure 4 Timing Parameter Definitions in RSSI Trigger
PIN OUT DRAWING

Figure 5 Pin Out Drawing

PIN DESCRIPTION			
PIN	Name	Description	Notes
1	GND	Module Ground	
2	TX-1G-P	Non-Inverted Transmit Data in	LVPECL input, AC coupled
3	TX-1G-N	Inverted Transmit Data in	LVPECL input, AC coupled
4	GND	Module Ground	
5	TX_DIS	Transmitter Disable	LVTTTL Input, Low : transmitter on
6	VCC5	+5V Power Supply	
7	GND	Module Ground	
8	VCC3_TX	Transmitter 3.3V Power Supply	
9	VCC3_RX	Receiver 3.3V Power Supply	
10	SCL	The clock line	The clock line of two wire serial interface
11	SDA	The data line	The data line of two wire serial interface
12	MOD_ABS	Indicates Module is not present.	Grounded in the Module
13	NC	Not connected	
14	LOS	LOS Indication	LVTTTL output, active high when the receiver lost signal
15	GND	Module Ground	
16	GND	Module Ground	
17	RD_10G_N	Inverted 10G Received Data Out	CML output, DC coupled
18	RD_10G_P	Non-inverted 10G Received Data Out	CML output, DC coupled
19	GND	Module Ground	
20	RD_1G_N	Inverted 1G Received Data Out	LVPECL Output, DC coupled
21	RD_1G_P	Non-inverted 1G Received Data Out	LVPECL Output, DC coupled
22	N.C.	Not be Connected in the transceiver	
23	RSSI_TRIG	RSSI Trigger for Transceiver	RSSI Trigger
24	N.C.	Not be Connected in the transceiver	
25	N.C.	Not be Connected in the transceiver	
26	N.C.	Not be Connected in the transceiver	
27	GND	Module Ground	
28	TX_10G_N	Inverted Transmit Data in	CML input, AC coupled
29	TX_10G_P	Non-Inverted Transmit Data in	CML input, AC coupled
30	GND	Module Ground	

TYPICAL INTERFACE CIRCUIT

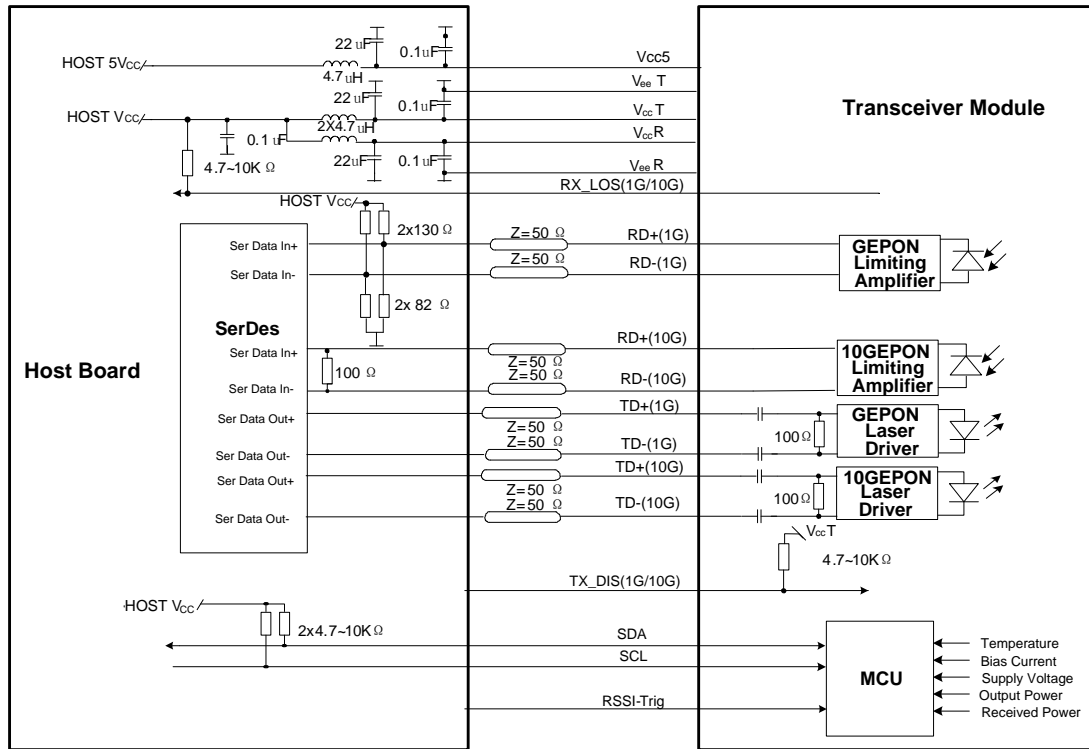


Figure 6 Typical Interface Circuit

PACKAGE OUTLINE

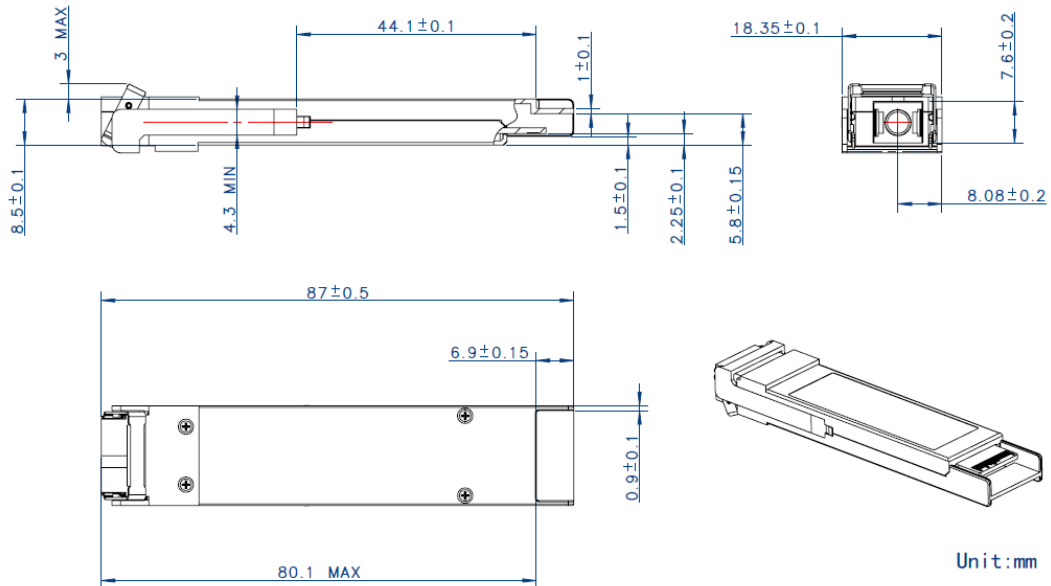


Figure 7 Package Outline

EEPROM INFORMATION

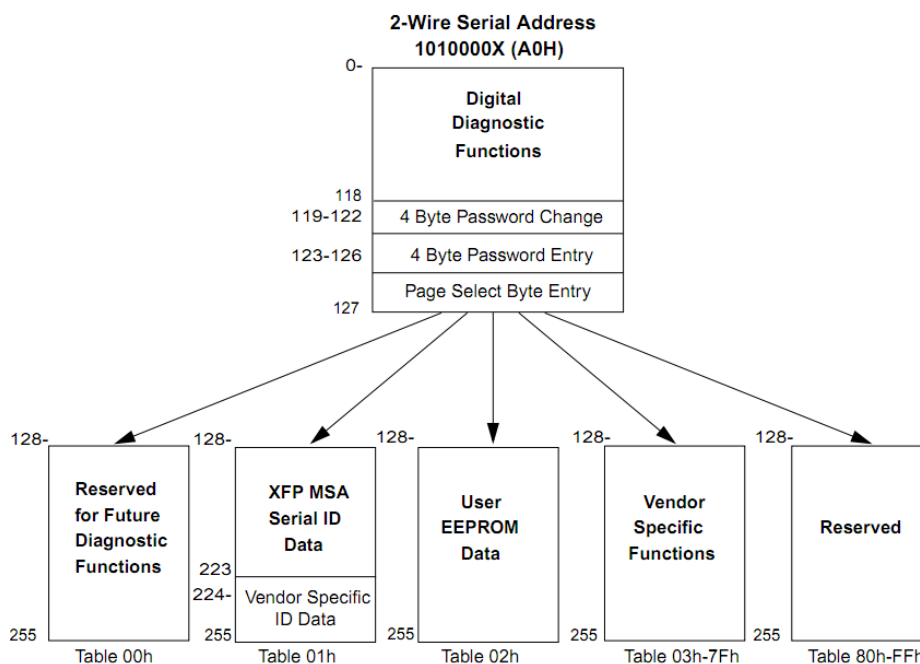


Figure 8 EEPROM Memory Map Specific Data Field Descriptions

DIGITAL DIAGNOSTIC MONITORING INTERFACE				
Parameter	Range	Accuracy	Calibration	NOTES
Temperature	0 to 70°C	±3°C	Internal	LSB: 1/256C
Voltage	2.97 to 3.63V	±3%	Internal	LSB: 0.1mV
Bias Current_1G	0 to 131mA	±10%	Internal	LSB: 2uA
TX Power_1G	2 to 7dBm	±2dB	Internal	LSB: 0.1uW
Bias Current_10G	0 to 131mA	±10%	Internal	LSB: 2uA
TX Power_10G	2 to 5dBm	±2dB	Internal	LSB: 0.1uW
RX Power monitor	-31 to -6dBm	±2dB	Internal	LSB: 0.1uW

ORDERING INFORMATION

PN	Temperature Rating	Unit
SOEX6277-XSGB	0 ~ 70	°C

WARNINGS

- Handling Precautions: This device is susceptible to damage as a result of electrostatic discharge (ESD). A static free environment is highly recommended. Follow guidelines according to proper ESD procedures.
- Laser Safety: Radiation emitted by laser devices can be dangerous to human eyes. Avoid eye exposure to direct or indirect radiation.

LEGAL NOTES

- All information contained in this document is subject to change without notice, at Superxon’s sole and absolute discretion. Superxon Technology warrants performance of its products to current specifications only in accordance with the company’s standard one-year warranty; however, specifications designated as “preliminary” are given to describe components only, and Superxon Technology expressly disclaims any and all warranties for said products, including express, implied, and statutory warranties, warranties of merchantability, fitness for a particular purpose, and non-infringement of proprietary rights. Please refer to the company’s Terms and Conditions of Sale for further warranty information.
- Superxon Technology assumes no liability for applications assistance, customer product design, software performance, or infringement of patents, services, or intellectual property described herein. No license, either express or implied, is granted under any patent right, copyright, or intellectual property right, and Superxon Technology makes no representations or warranties that the product(s) described herein are free from patent, copyright, or intellectual property rights. Products described in this document are NOT intended for use in implantation or other life support applications where malfunction may result in injury or death to persons. Superxon Technology customers using or selling products for use in such applications do so at their own risk and agree to fully defend and indemnify Superxon Technology for any damages resulting from such use or sale.
- THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROVIDED ON AN “AS IS” BASIS. Customer agrees that Superxon Technology is not liable for any actual, consequential, exemplary, or other damages arising directly or indirectly from any use of the information contained in this document. Customer must contact Superxon Technology to obtain the latest version of this publication to verify, before placing any order, that the information contained herein is current.
- Copyright © 2016 Sichuan Superxon Information Technology Co., Ltd.

All rights reserved.